

TOPONE


Catalog 2025



Self-drilling Screws

Metal to MetalMetal to Timber



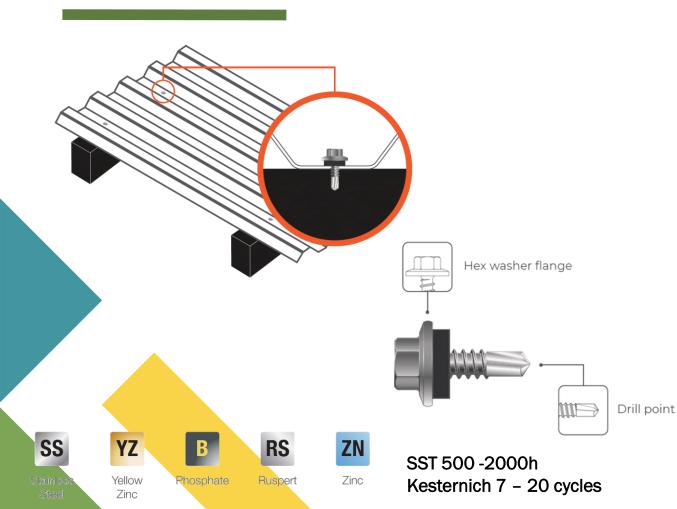

Valley / Cladding fastening

SDS-1.1.HEW-1016 SDS-1.2.HEW-1019 SDS-1.3.HEW-1025

- Carbon steel screws for fastening steel

sheets to steel substrates

- For light duty application

Specification:

Gauge #10 #10-16x16 #10-16x19 #10-16x25

5	d (mm)	TPI	Length		
			(mm)	(inch)	
)		16	16	5/8"	
5	4.8		19	3/4"	
			25	1″	

Adapter in use: Magnetic Hex Socket (5/16')

Washer: E.P.D.M

Coating








Point



SD-2.1.HEW-1219 SD-2.2.HEW-1225 SD-2.3.HEW-1235

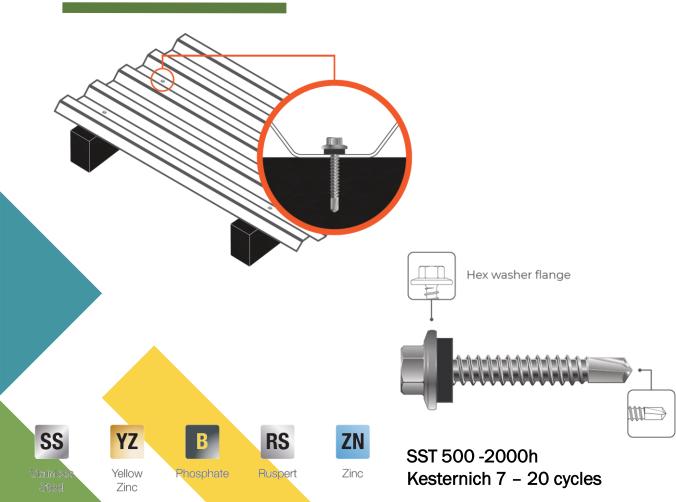

Valley / Cladding fastening

- Carbon steel screws for fastening steel

sheets to steel substrates

- For light duty application

Specification:

- Gauge #12 #12-14x19 #12-14x25 #12-14x35

Drill point

	d	TPI	Length		
	(mm)		(mm)	(inch)	
		14	19	3/4"	
	5.5		25	1″	
			35	1-3/8"	

Adapter in use: Magnetic Hex Socket (5/16') Washer: E.P.D.M washer Aluminum bonded washer






Point

#3



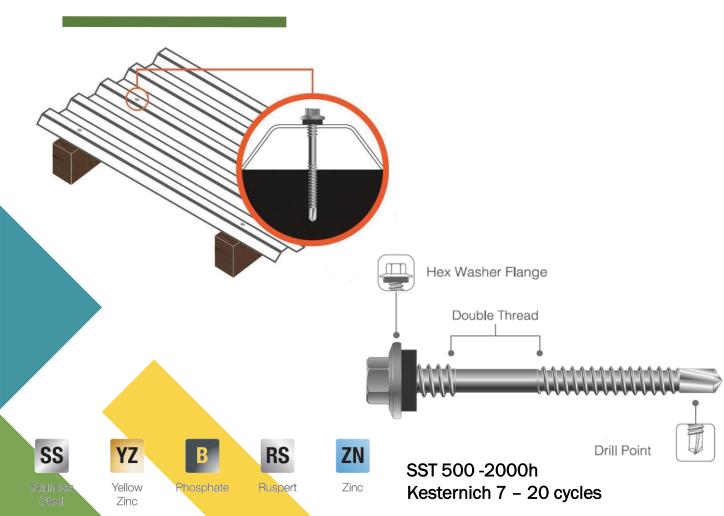

Crest fastening

- Carbon steel screws for fastening steel sheets to steel substrates

Specification:

Gauge #12 #12-14x50 #12-14x55 #12-14x68

	d	TPI	Length		
)	(mm)		(mm)	(inch)	
	5.5	14	50	2″	
			55	2-3/16"	
			68	2-3/4"	

SDS-3.1.HEW-1250

SDS-3.2.HEW-1255

SDS-3.3.HEW-1268


Adapter in use: Magnetic Hex Socket (5/16') Washer: E.P.D.M / bonded washer









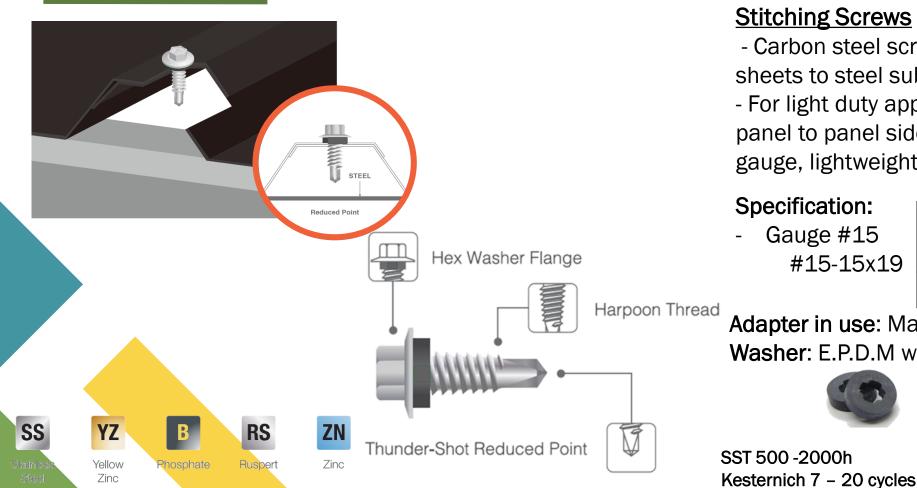

Stitching Screws

- Carbon steel screws for fastening steel sheets to steel substrates

- For light duty application such as fastening panel to panel side lap, panel to end lap light gauge, lightweight steel, ...

Specification

Gauge #1 #15-15>

1: .5	d (mm)	TPI	Length	
.5 x19	d (mm)		(mm)	(inch)
_	6.5	15	19	3/4"

SDS-4.1.HEW-1519.R

Adapter in use: Magnetic Hex Socket (5/16') Washer: E.P.D.M washer Aluminum bonded washer





#3

Point




SDS-5.1.W-1016

SDS-5.2.W-1022 SDS-5.2.W-1032 SDS-5.2.W-1050

Self-drilling Screws – M2M fastening (Screws for metal)

Thunder Shot Point

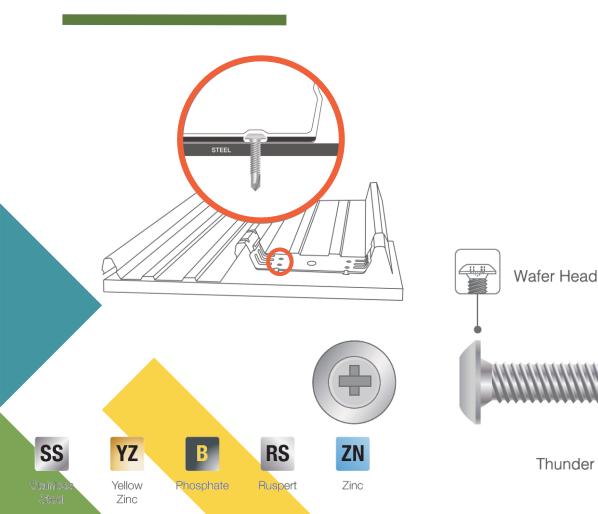


Concealed fastening

- Carbon steel screws for fastening steel sheets to steel substrates
- Residential steel frame construction
- For light duty

Specification:

- Gauge #10
- #10-24x16
- #10-24x22
- #10-24x32
- #10-24x50



Adapter in use: Philips Bit (PH2+)


SST 1000h

Kesternich 10 - 12 cycles







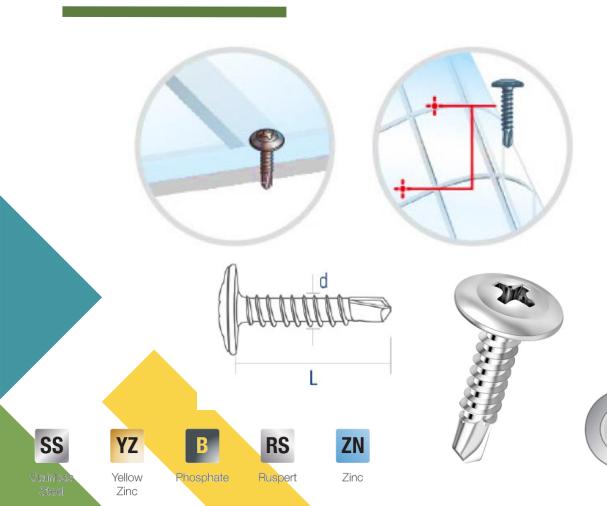

Truss head fastening

SDS-6.1.T-0813 SDS-6.2.T-0819

- Carbon steel screws for fastening steel, polycarbonate, panel sheets, ... to steel substrates
- Residential steel frame construction
- For light duty

Specification:

- Gauge #8
 - #8-18x13 #8-18x19

	d	TPI	Leng	;th
	(mm)		(mm)	(inch)
	4.2	18	13	1/2"
		10	19	3/4"

Adapter in use: Philips Bit (PH2+)

#1

Coating Point


RS

Ruspert

ert



SDS-7.1.C-0838.W

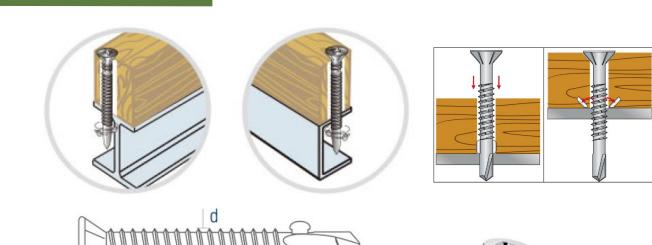

Expansion Wings

RS

Ruspert

ZN

Zinc

SS

Yellow

Zinc

Countersunk Wing

- Carbon steel screws for fastening wood mansard, plywood, floor sheet, ... to steel substrates

 Flat head design countersunk and seats flush in wood

Specification:

- Special winged fasteners ream a hole in wood

Gauge #8	d	TPI	Length	
#8-18x38	(mm)		(mm)	(inch)
	4.2	18	38	1-1/2"

Adapter in use: Philips Bit (PH2+)

SST 500 - 2000h Kesternich 7 – 20 cycles



Coating


Ruspert



Point

R



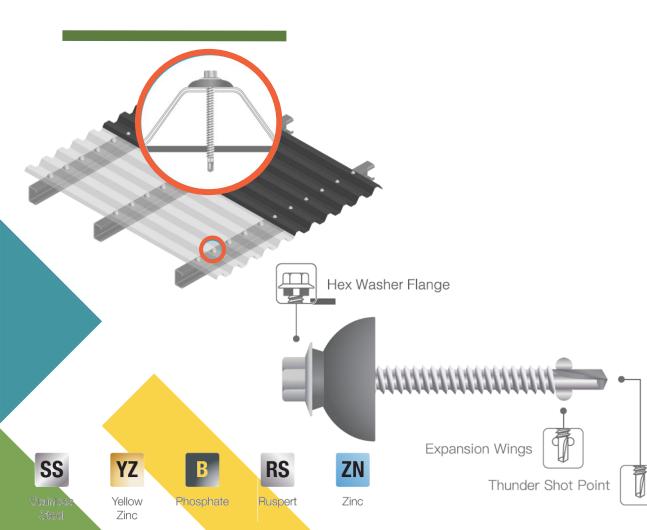

Plastic skylight fastening

SDS-8.1.HDW-1240.W SDS-8.2.HDW-1255.W

- Carbon steel screws for reaming a thermal expansion hole on plastic skylight sheets and fix onto sheet substrates .

Specification:

- Special winged fasteners ream a hole in wood
- Gauge #12 #12-14x40

#12-14x55

d	TPI	Length		
(mm)	IPI	(mm)	(inch)	
	14	40	1-5/8"	
5.5		55	2-3/16"	

Adapter in use: Magnetic Hex Socket (5/16') Washer: OD 25mm Dome E.P.D.M, Coat






SST 500 -2000h Kesternich 7 – 20 cycles

Ruspert



Point



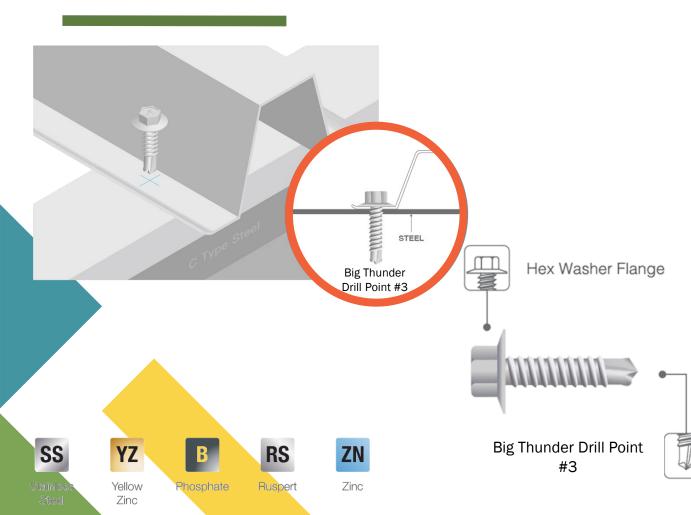

Truss fastening

- Carbon steel screws for fastening steel trusses to steel which thick from 0.75mm to 1.6mm

- For light duty application

Specification:

- Gauge #12 #12-14x20

: 2	d	TPI	Length	
20	(mm)		(mm)	(inch)
	5.5	14	20	3/4"

Adapter in use: Magnetic Hex Socket (5/16')

SST 500 -2000h Kesternich 7 – 20 cycles

Coating Point






Ruspert

SDS-9.1.HNW-1220.B



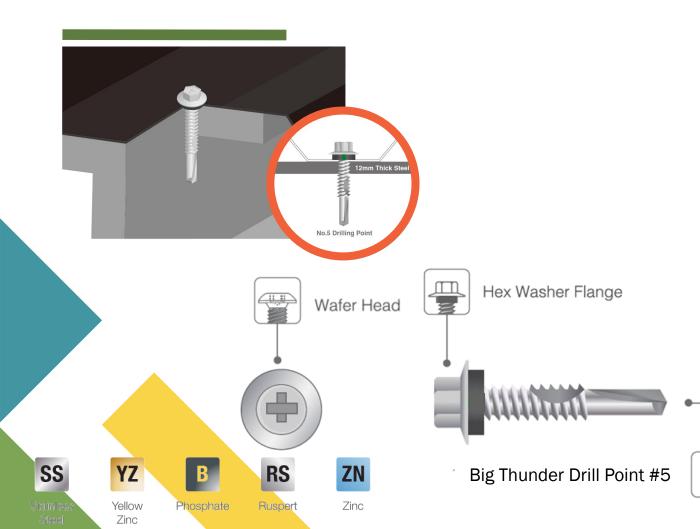

Thick steel fastening


- Carbon steel screws for fastening cladding to thick steel which thick max 12mm

- For heavy duty application

Specification:

- Gauge #12 #12-24x38
- Head type:

SST 500 -2000h



SDS-10.1.HEW-1238.B

- Hex Washer Flange

- Wafer

Adapter in use: Magnetic Hex Socket (5/16') Washer: E.P.D.M



Coating Point



#5

Ruspert

Kesternich 7 – 20 cycles




Self-tapping Screws

Metal to Timber



Self-tapping Screws – M2T fastening (Screws for timber)

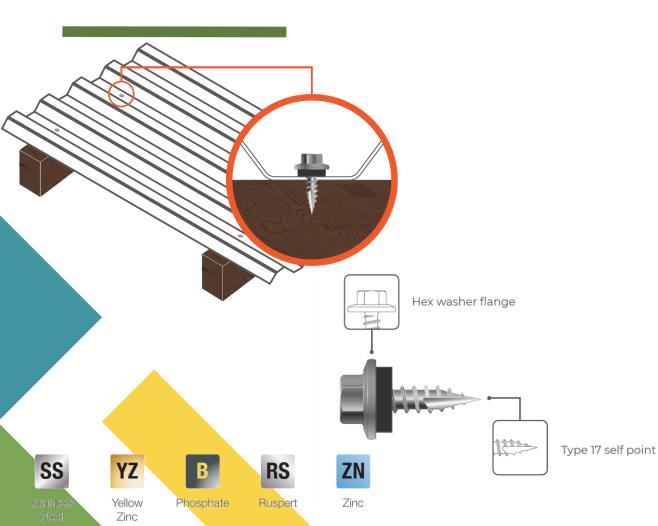

Valley/ Cladding fastening

- Carbon steel screws for fastening steel
- sheets to timber substrates
- For light duty application

Specification:

- Gauge #10 #10-12x2

) (19	d	TPI	Length	
	(mm)		(mm)	(inch)
	4.8	12	19	3/4"

Adapter in use: Magnetic Hex Socket (5/16')

Washer: E.P.D.M,






RS Ruspert

SST 500 -2000h Kesternich 7 – 20 cycles STS-1.1.HEW-1019



Self-tapping Screws – M2T fastening (Screws for timber)

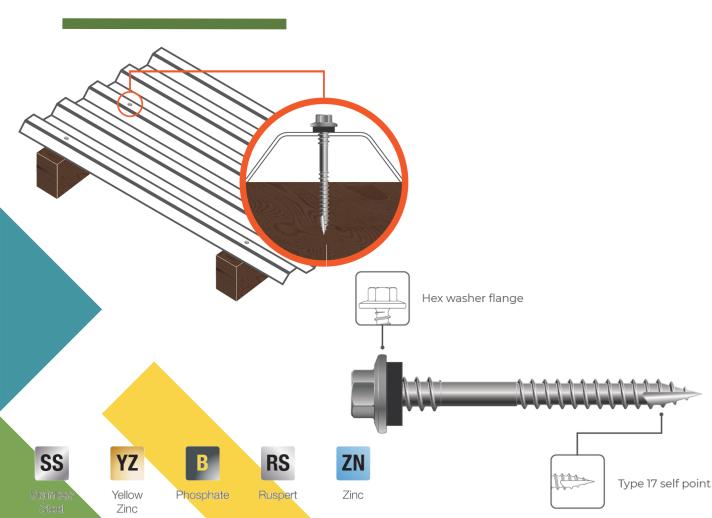

Crest fastening Screws

STS-2.1.HEW-1250 STS-2.2.HEW-1255 STS-2.3.HEW-1268

- Carbon steel screws for fastening steel sheets to timber substrates

Specification:

Gauge #12 #12-11x50 #12-11x55 #12-11x68

	d		Length	
0	(mm)	TPI	(mm)	(inch)
5	5.5	11	50	2″
.0			55	2-3/16"
			68	2-3/4"

Adapter in use: Magnetic Hex Socket (5/16') Washer: E.P.D.M washer, Bonded washer Coating





RS

Ruspert

SST 500 -2000h Kesternich 7 – 20 cycles



Drywall Screws

Drywall to Metal
Drywall to Timber



DW-1.1.B-0632 DW-1.2.B-0641

Drywall screws for thin metal

SS YZ RS ZN Ruspert Zinc Yellow Phosphate Zinc

Bugle Head – Fine Thread

Carbon steel for fastening drywall to thin steel

Specification:

- Fine Thread
- Bugle head phillips
- #6x1-1/4" (M3.5x32mm)
- #6x1-5/8" (M3.5x41mm)

Adapter in use: Philips Bit (PH2+)


Coating





Drywall screws for timber

DW-2.1.B-0632 DW-2.2.B-0641

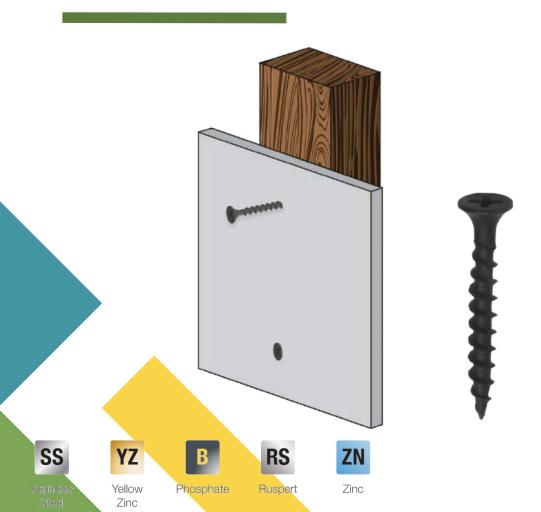

Bugle Head – Coarse Thread Carbon steel for fastening drywall to Timber

Specification:

- Coarse Thread
- Bugle head phillips
- #6x1-1/4" (M3.5x32mm)
- #6x1-5/8" (M3.5x41mm)

Adapter in use: Philips Bit (PH2+)

Coating



Thank you



TOM TANG Founder & CEO

- 860 QL 1A st, Binh Tri Dong A ward, Binh Tan Dist, HCM City, VietNam.
- **Uhatsapp: +84 933 888 239**
- 🔀 tom@toponevn.com



TOPONE BUILDING MATERIAL TRADING PRODUCTION COMPANY LIMITED



- Head Office: 10/16 Thoai Ngoc Hau Street, Hoa Thanh Ward, Tan Phu District, Ho Chi Minh City, VietNam.
- Factory 1: 860 National Highway 1A, Binh Tri Dong A Ward, Binh Tan District, Ho Chi Minh City, VietNam.
- Factory 2: 142/1 My Phuoc Street Tan Van, Binh Quoi B, Binh Chuan Ward, Thuan An City, Binh Duong Province
- Business number: 0313669293